

Patented Dec 11, 1901

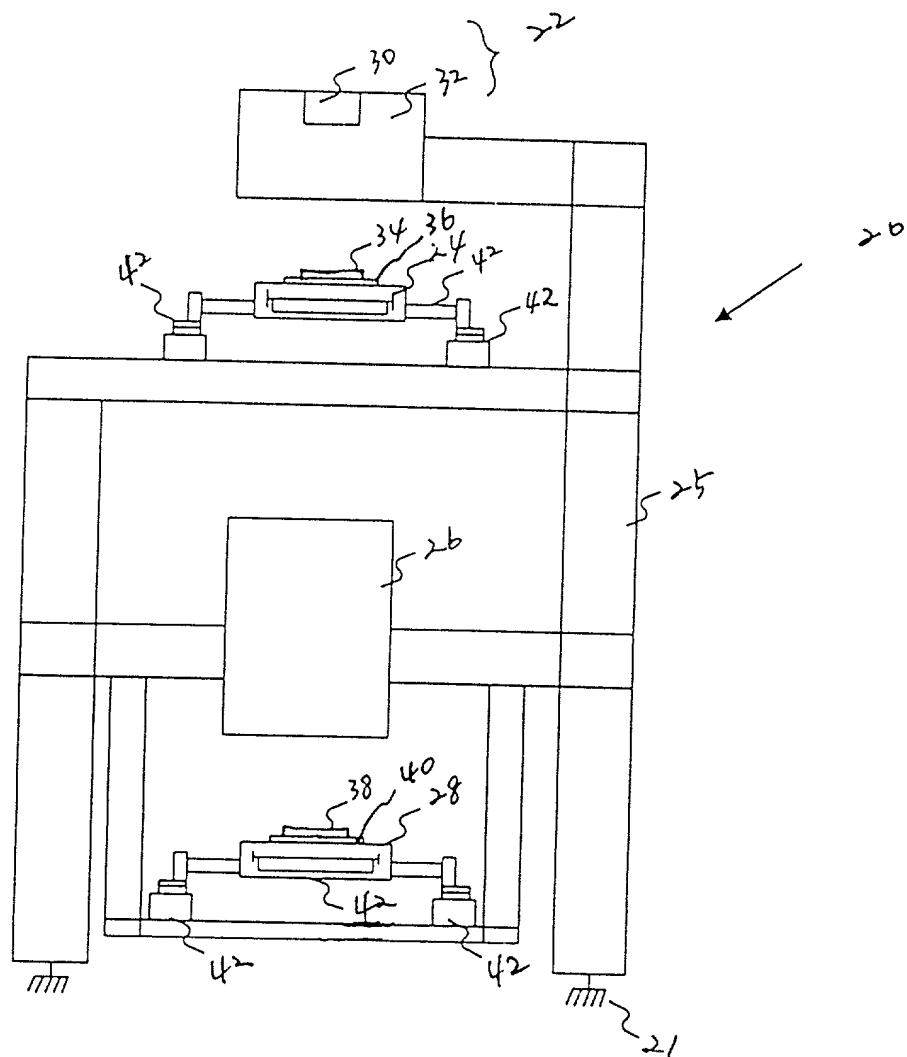
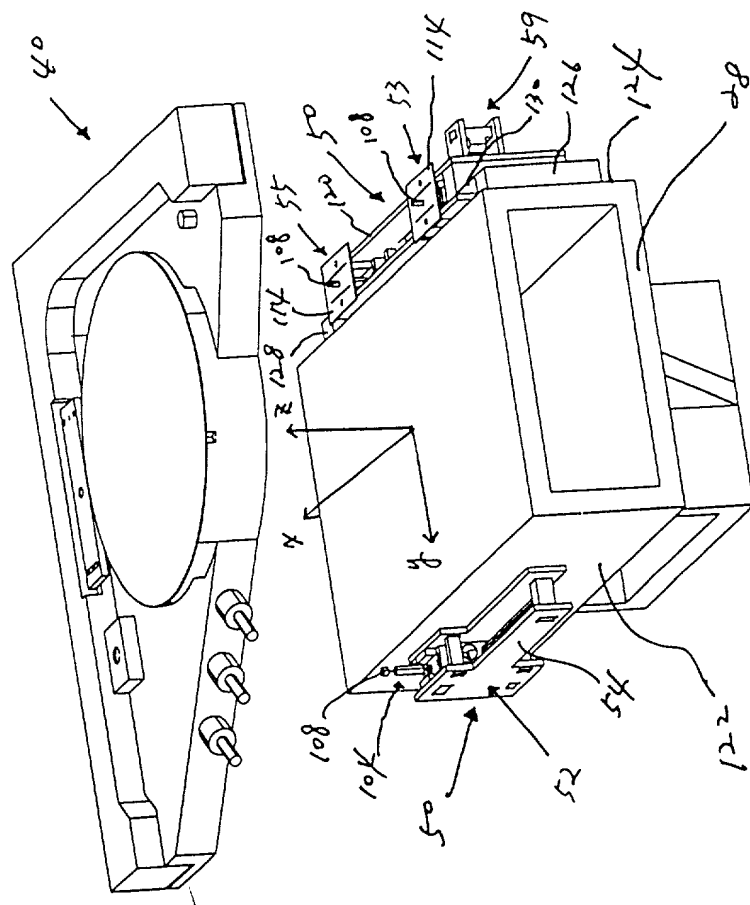




Fig. 1

[illegible]

2

[illegible]

Variable	Mean	SD	Min	Max
Age	38.5	10.5	25	55
Gender	0.5	0.5	0	1
Marital status	0.5	0.5	0	1
Education	12.5	1.5	10	15
Income	1500	500	1000	2500
Health status	0.5	0.5	0	1
Smoking status	0.5	0.5	0	1
Alcohol consumption	0.5	0.5	0	1
Exercise frequency	0.5	0.5	0	1
Stress level	0.5	0.5	0	1
Life satisfaction	0.5	0.5	0	1
Work satisfaction	0.5	0.5	0	1
Family satisfaction	0.5	0.5	0	1
Community satisfaction	0.5	0.5	0	1
Overall satisfaction	0.5	0.5	0	1

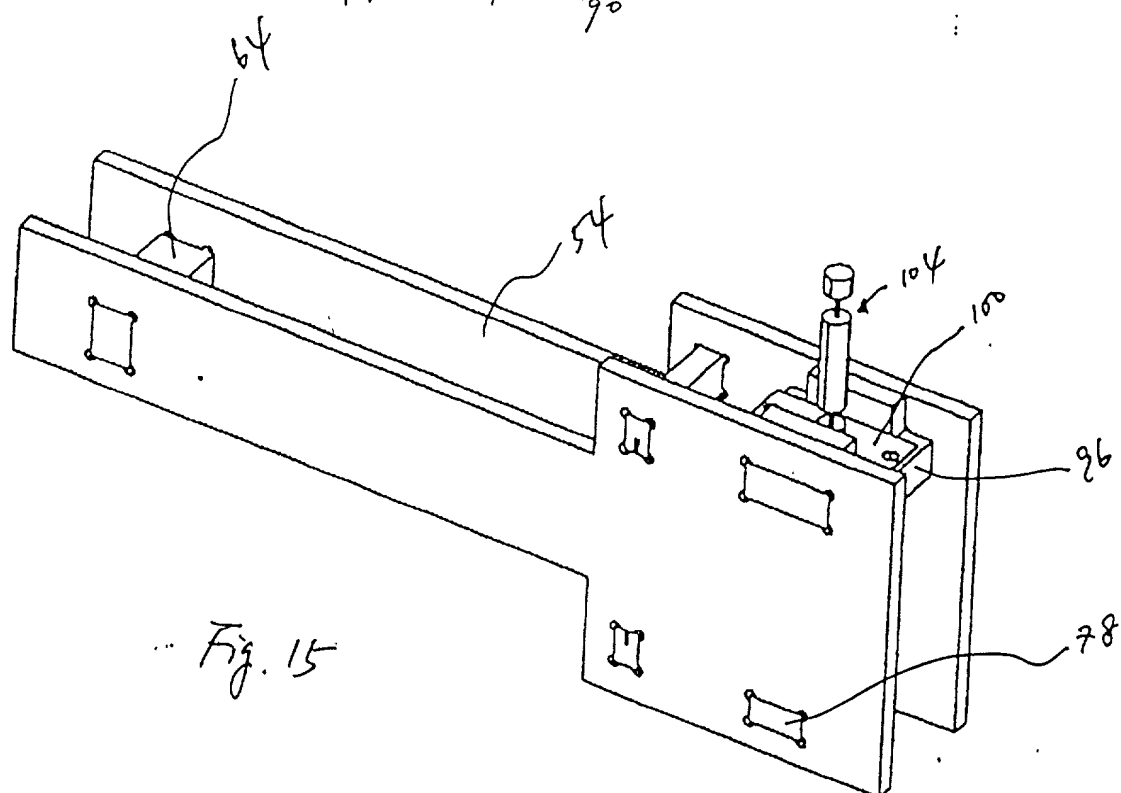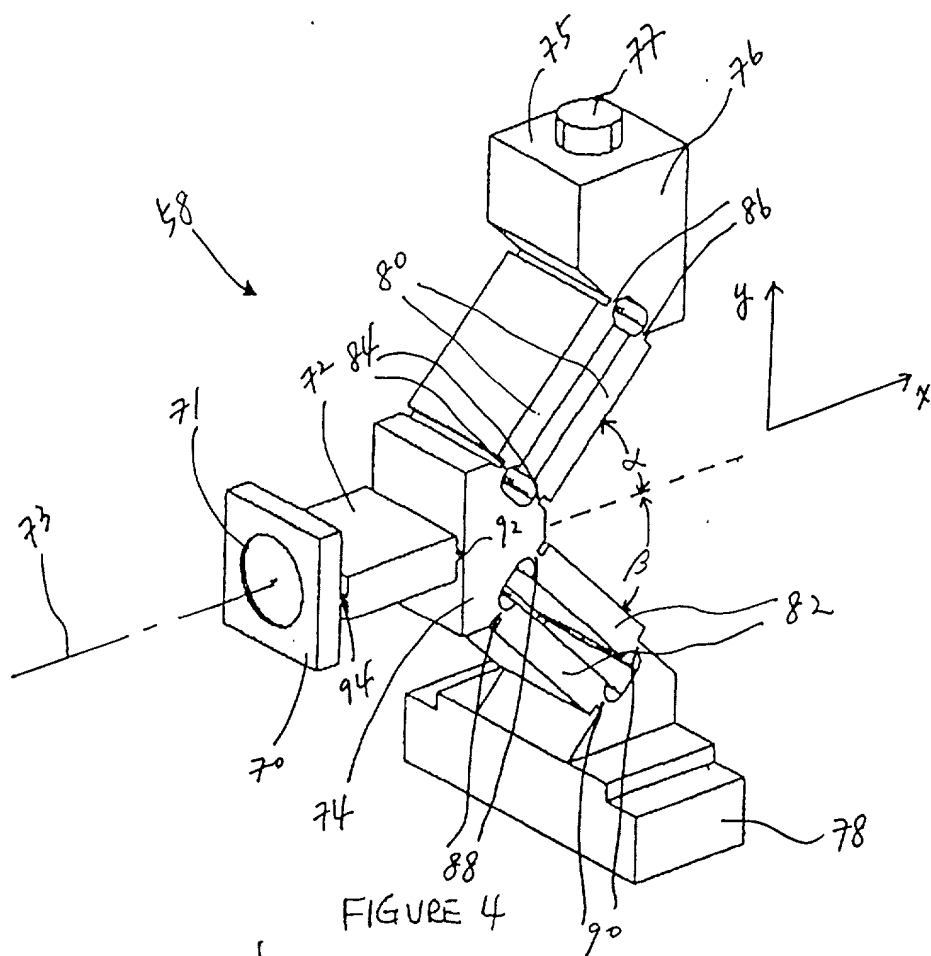

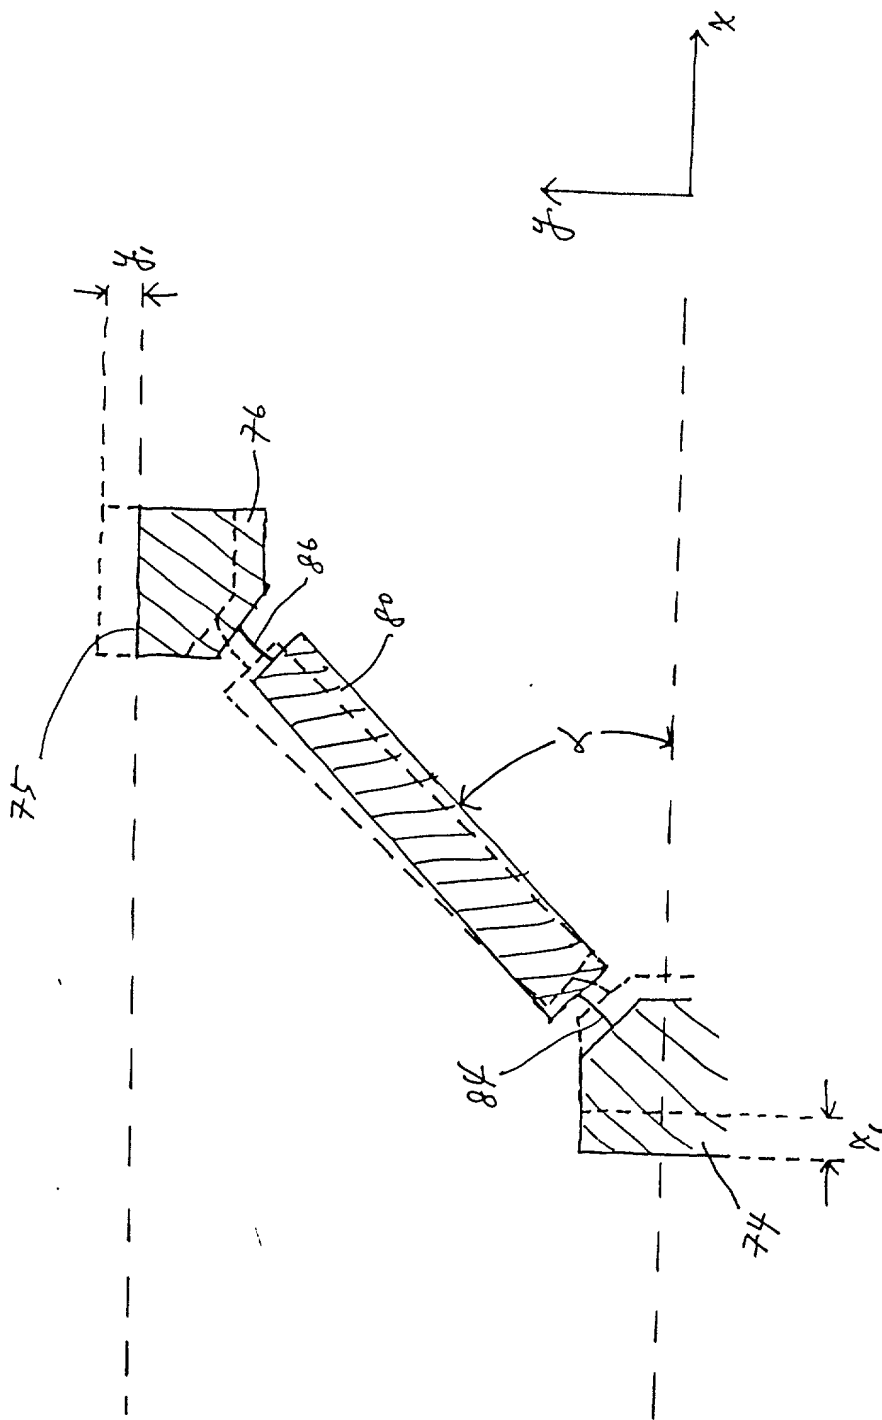


Fig. 5

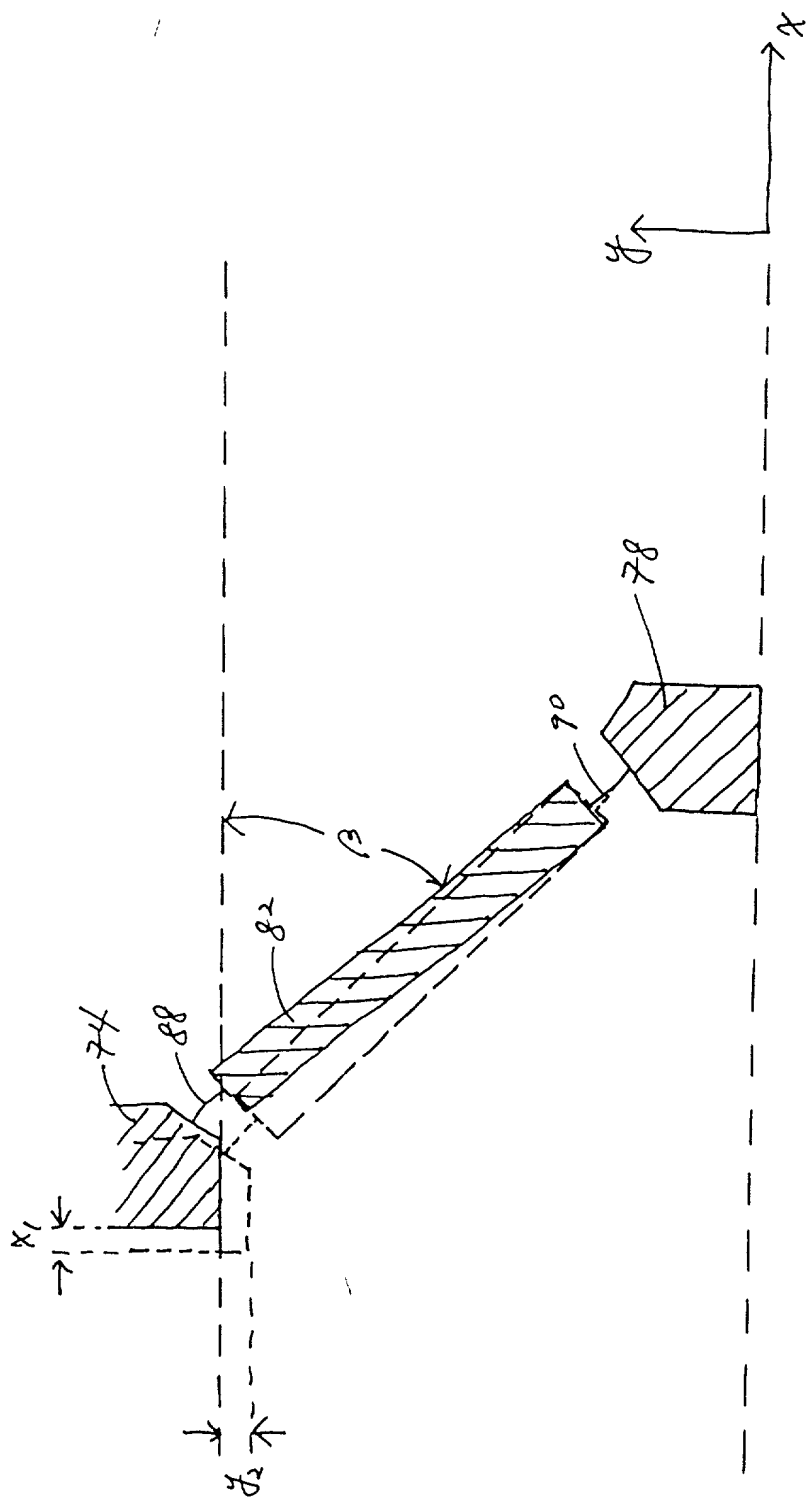


Fig. 8

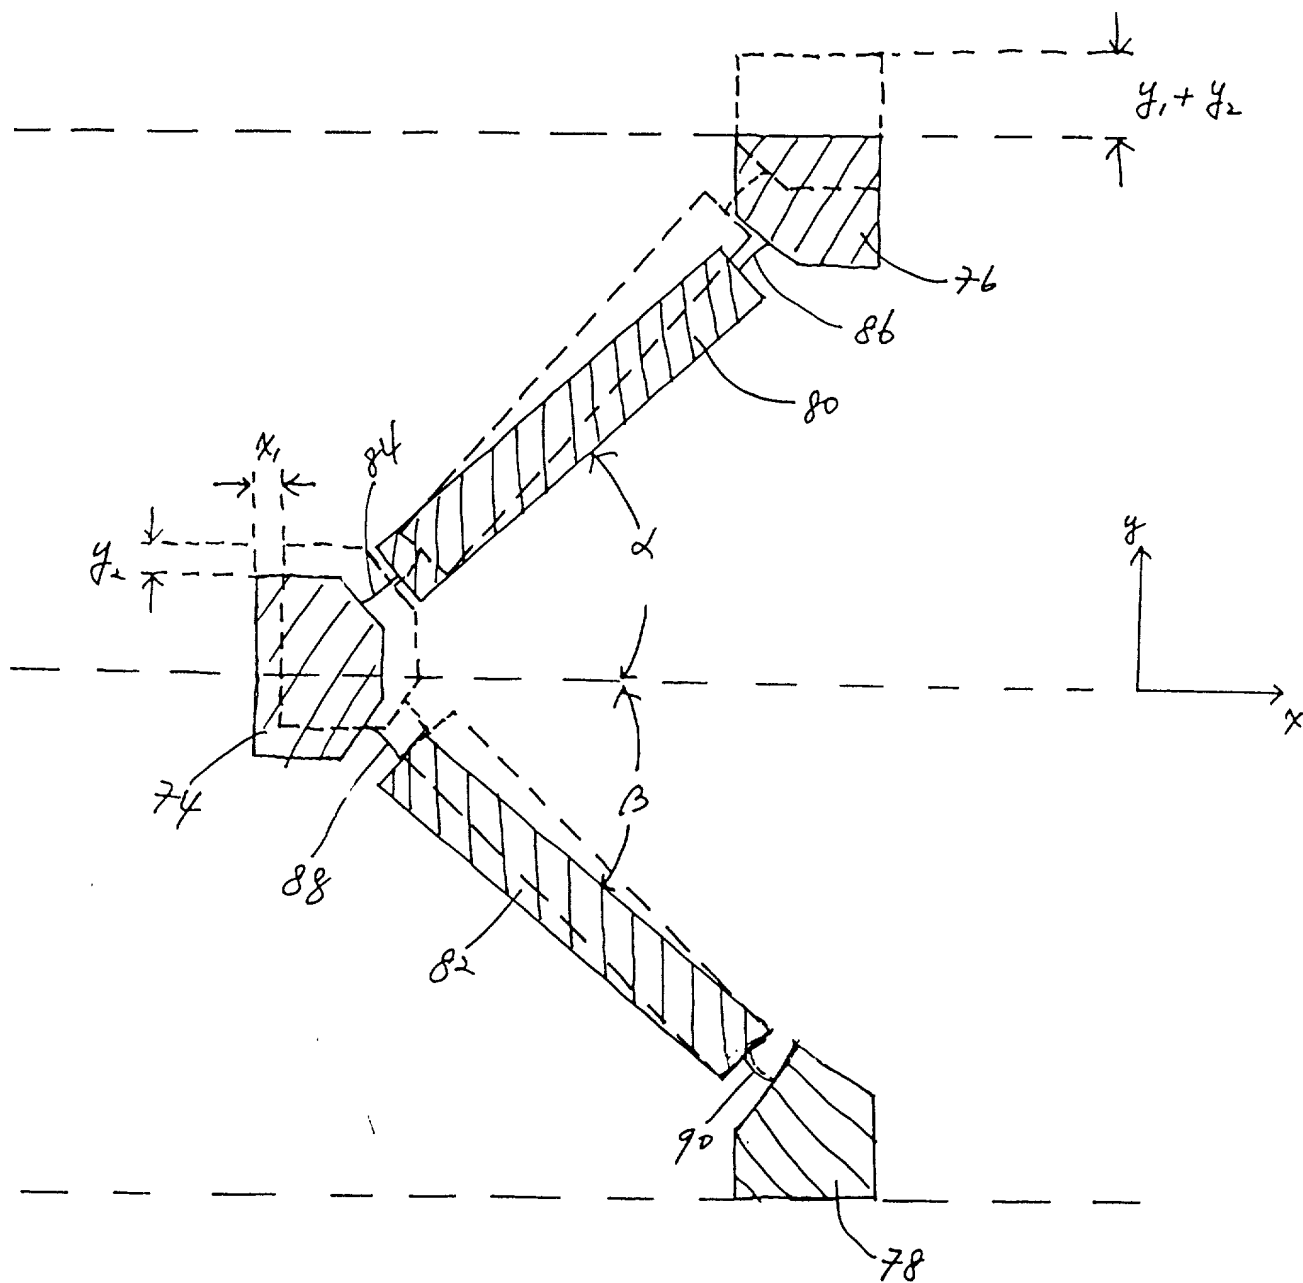


Fig. 9

FIG. 10

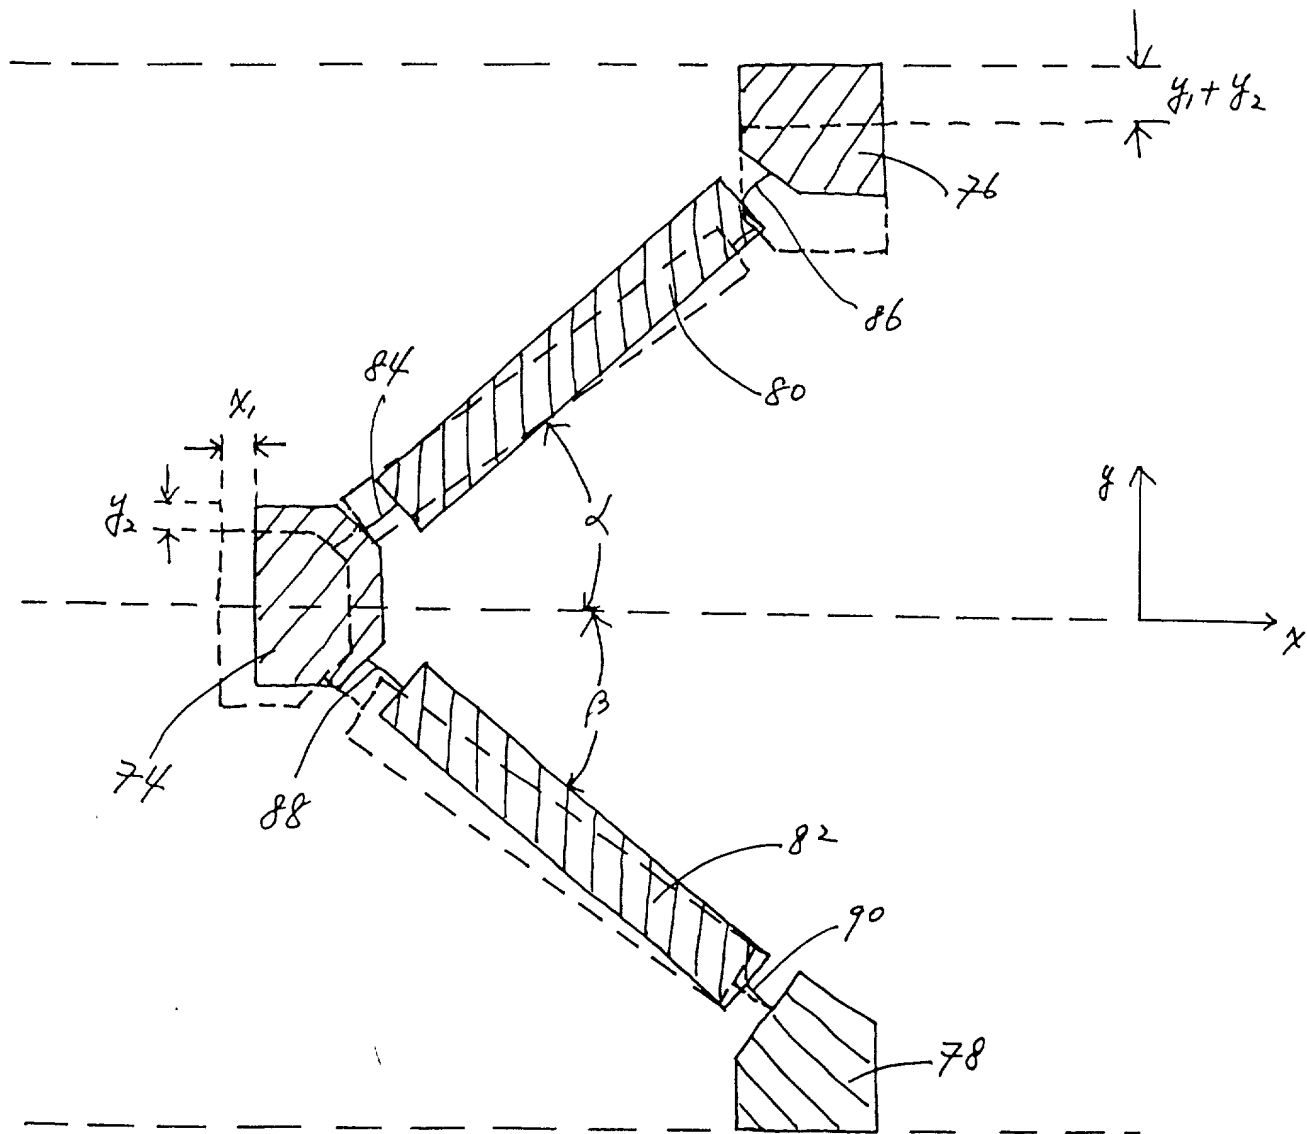


Fig. 10

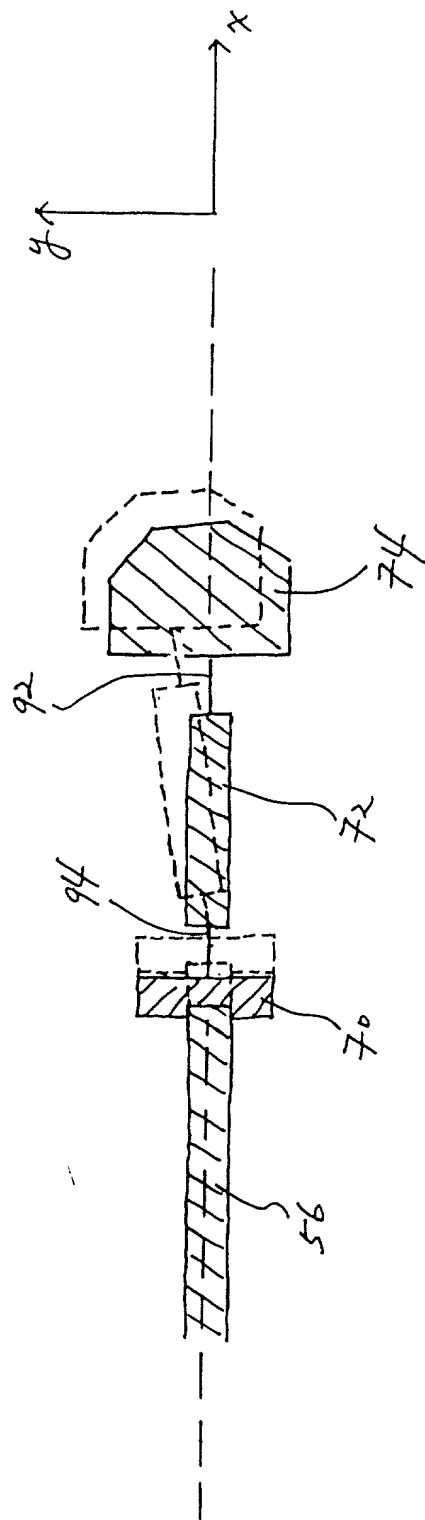


Fig. 11

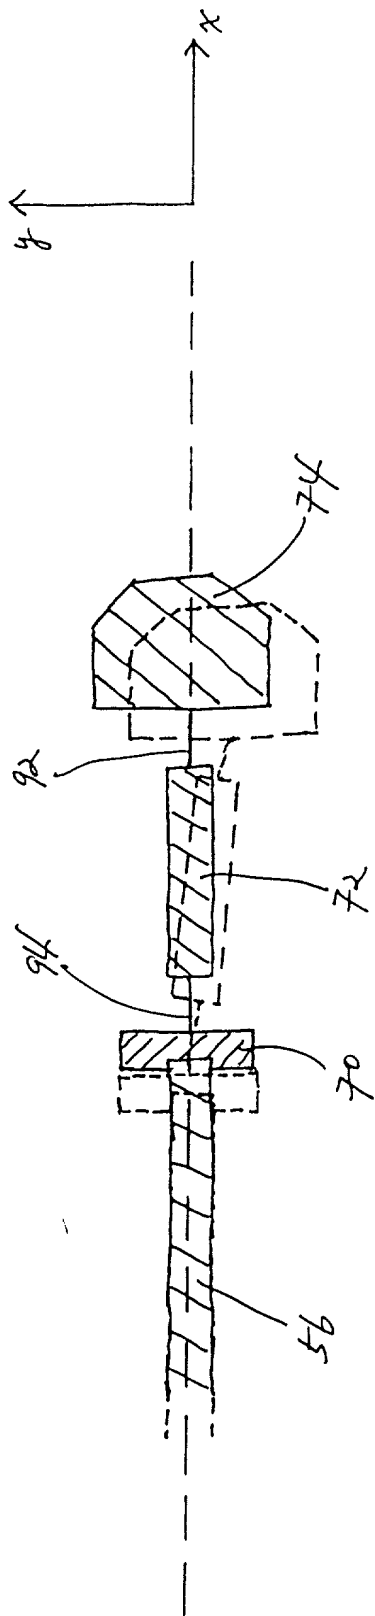


Fig. 12

This diagram shows an exploded perspective view of a mechanical assembly 100. The assembly includes a base plate 102 with a central opening 104. A vertical rod 106 is positioned to pass through the opening 104. The rod 106 has a threaded section 110 and a smooth section 112. A nut 108 is shown at the top of the rod. A bracket 101 is shown at the bottom of the rod. A horizontal plate 152 is shown below the base plate 102. The plate 152 has a central opening 155 and a side opening 158. A vertical rod 175 is shown passing through the opening 155. A bracket 174 is shown at the top of the rod 175. A horizontal plate 54 is shown to the left of the base plate 102. The plate 54 has a central opening 56 and a side opening 57. A vertical rod 60 is shown passing through the opening 56. A bracket 64 is shown at the top of the rod 60. A vertical rod 76 is shown passing through the opening 158. A bracket 96 is shown at the top of the rod 76. A bracket 98 is shown at the bottom of the rod 76. A coordinate system with X and Y axes is shown at the bottom right.

Fig. 13

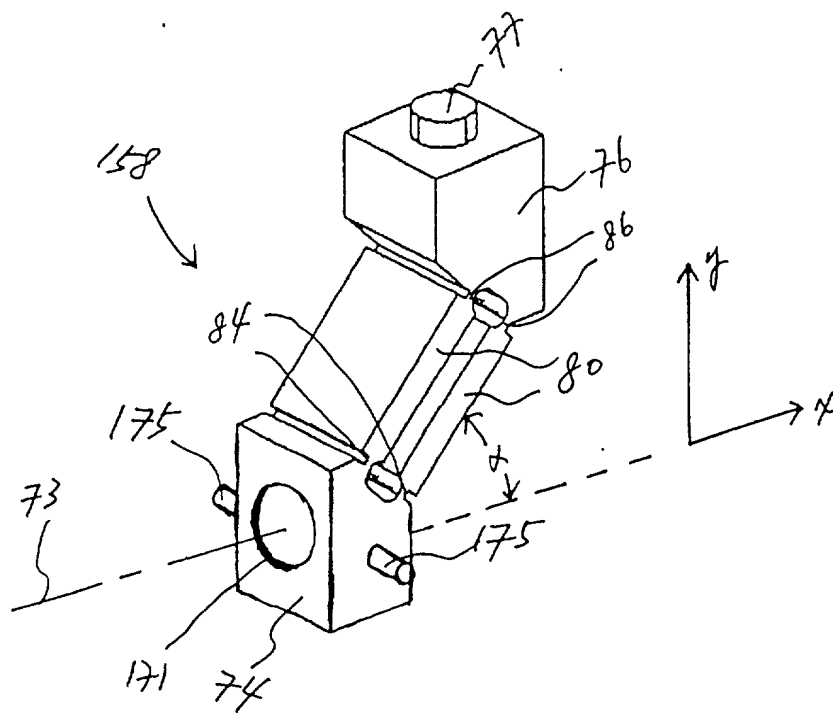


Fig. 14

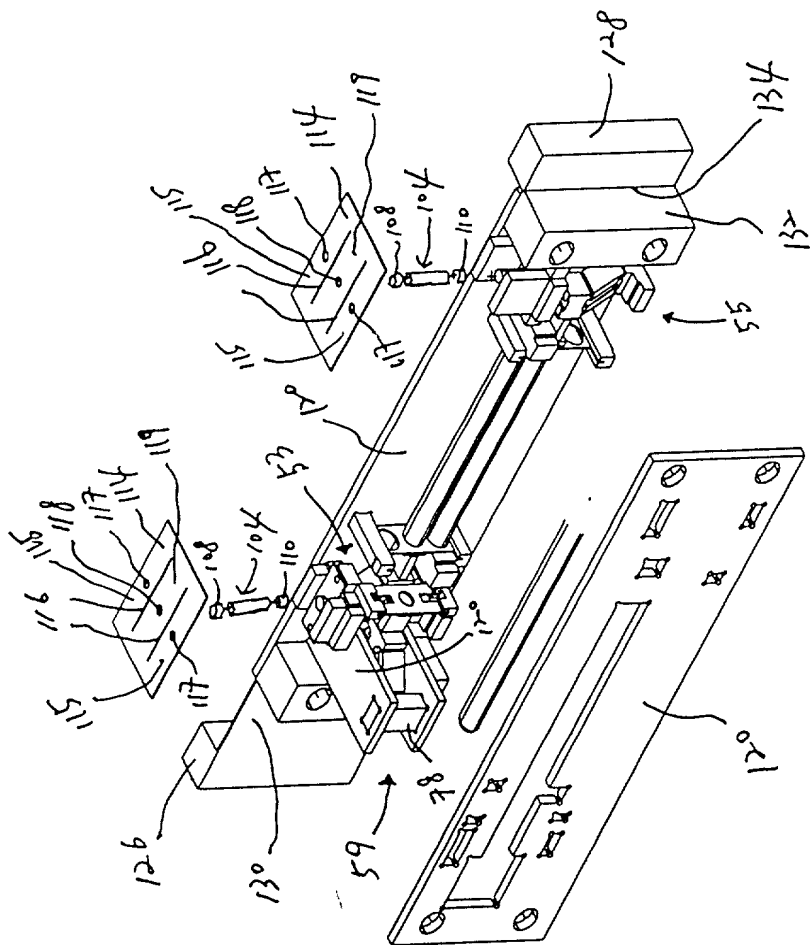


Fig. 16

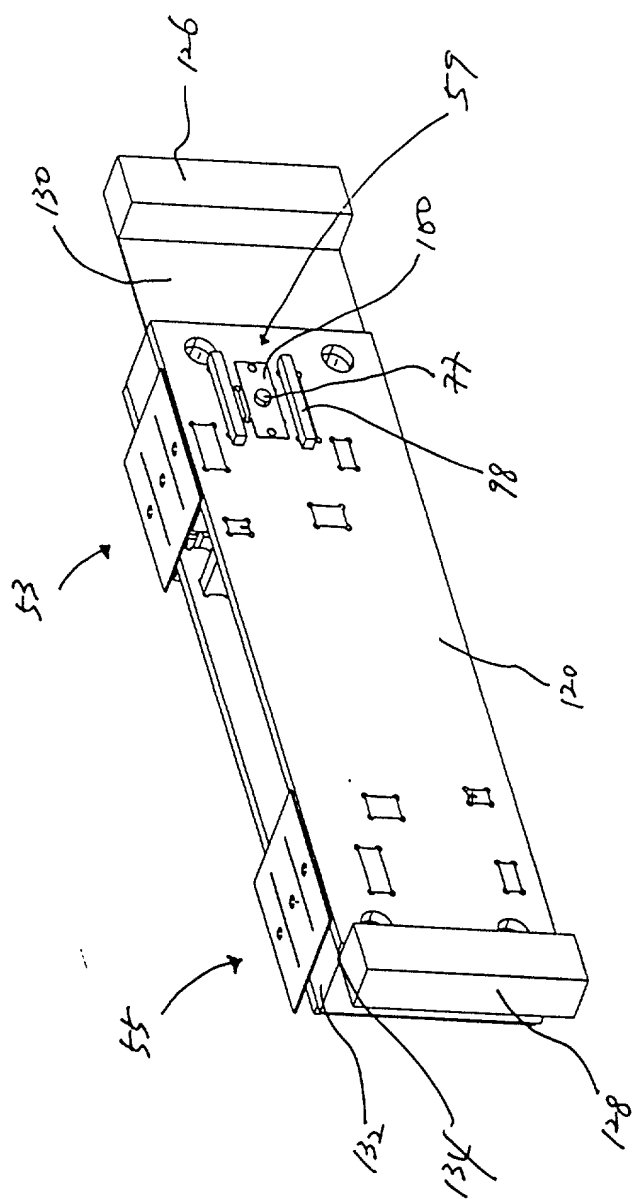


Fig. 17

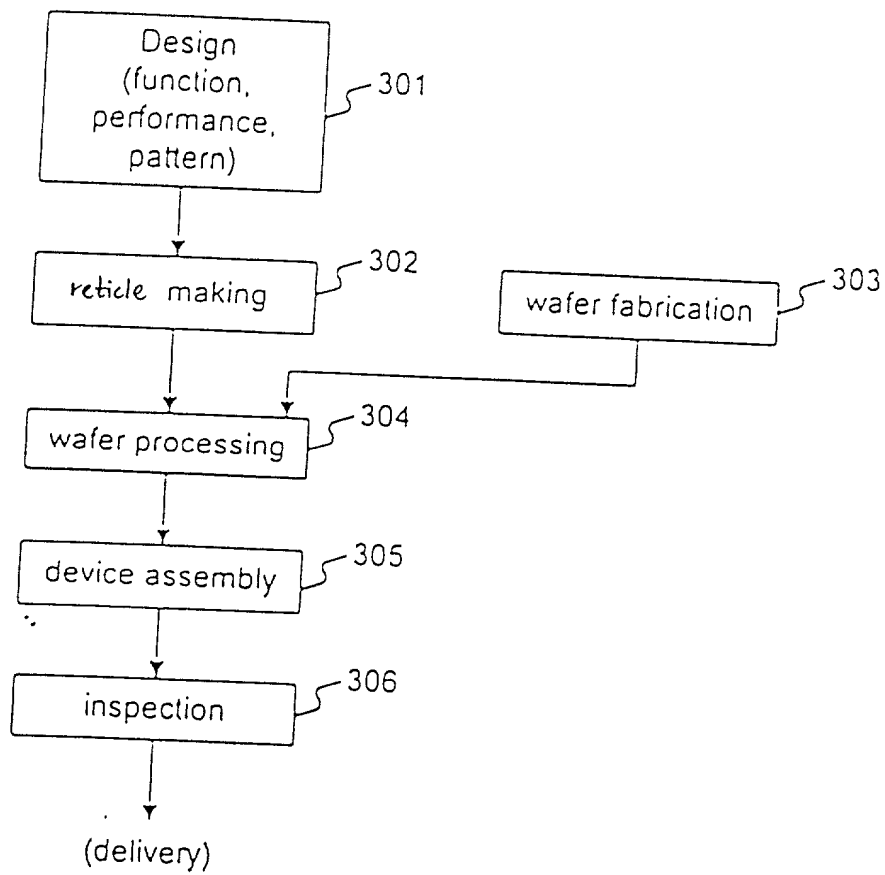


Fig. 18

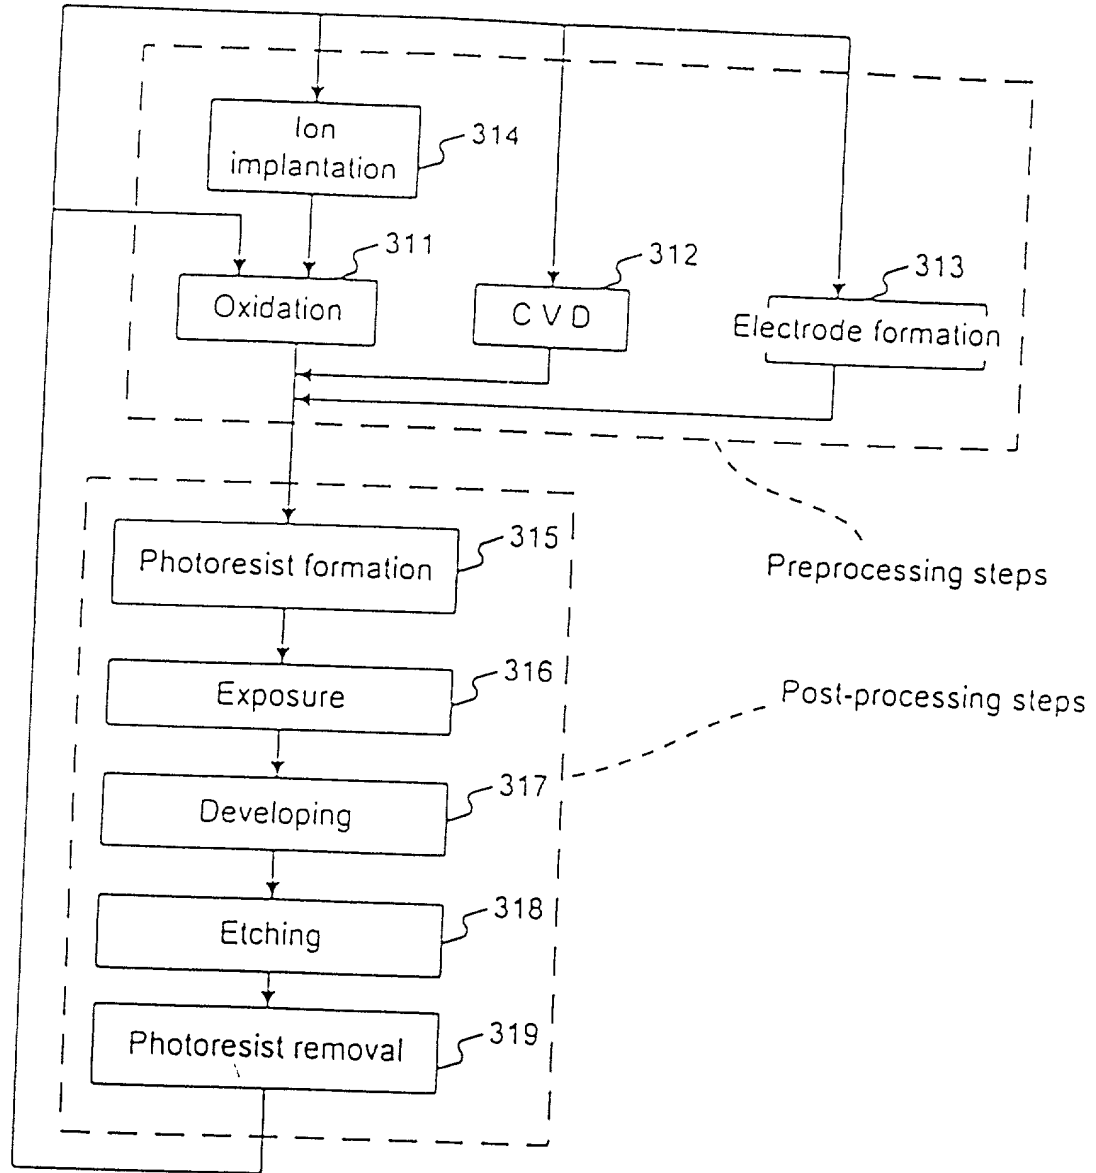


Fig. 19